

## TECHNICAL DATA SHEET

Resioak Hybrids is a quality Limestone Composite (SPC) flooring solution that offers exceptional performance within a value-driven range. Designed to meet the needs of residential spaces that require both lasting durability and aesthetic appeal, Resioak Hybrids combines reliable durability with a sophisticated finish.


The rigid SPC core ensures stability in fluctuating indoor conditions. With a robust wear layer, Resioak Hybrids offers excellent resistance to everyday use, maintaining its appearance and functionality with ease. Its embossed matte surface makes it easy to clean, ensuring long-term convenience for busy households.

### Product Details

<b>Board Style</b>	Plank
<b>Thickness</b>	8 mm
<b>Board Size (mm)</b>	1800 x 228
<b>Locking System</b>	Uniclic
<b>Finish</b>	Embossed Matte
<b>Edge Profile</b>	Micro Bevelled
<b>Sqm/ Box</b>	2.052m <sup>2</sup>
<b>Pieces / Box</b>	5
<b>Weight / Box</b>	26.7 kg
<b>Packaging Size (mm)</b>	1815 x 235 x 45
<b>Box / Pallet</b>	52

### Installation Methods


<b>Floating</b>	YES
<b>Glue Down</b>	NO
<b>Underfloor Heating</b>	NO

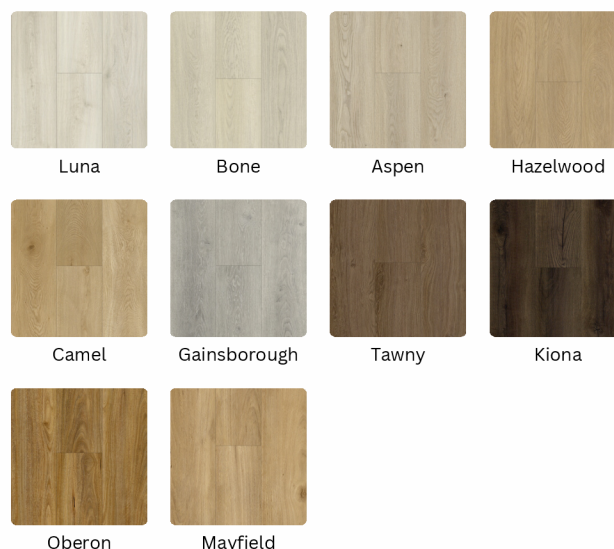

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

## Technical Summary

<b>Top Wear Layer</b>	0.3 mm UV Protect Anti-wear
<b>Decorative Layer</b>	TruEmbossed Wood Texture
<b>Core Structure</b>	Limestone Composite (SPC)
<b>Backing Layer</b>	2mm IXPE Underlay
<b>Acoustical Rating</b>	AAAC 5 Star
<b>Slip Resistance</b>	P3 / R10
<b>Fire Tested</b>	AS ISO 9239.1-2003
<b>TVOC Range</b>	PASS - Less than/equal to 0.5 mg/m <sup>3</sup>
<b>Formaldehyde Test</b>	Chamber value: 0.006 mg HCHO/m <sup>3</sup> of air Maximum of 3mm undulations
<b>Subfloor</b>	
<b>Durability</b>	Wear & stain resistant, water resistant
<b>Suitable Application</b>	Residential & Commercial

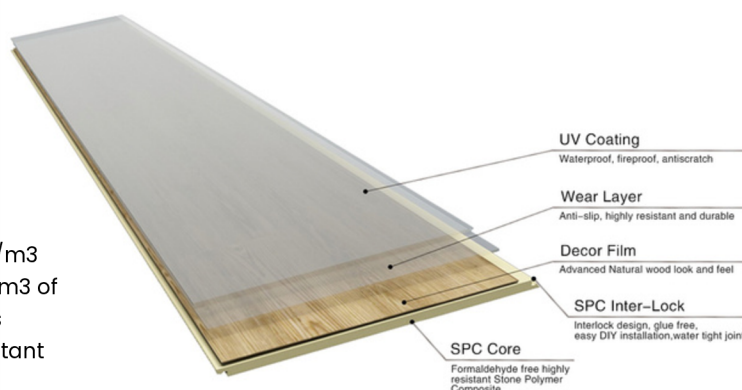

This technical data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product specifications at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.